

FPM-2102K

21.5inch Industrial Touch Monitor



Features

- Flat Panel Screen, 5mm ultra-thin
- 21.5inch LED Panel with projected capacitive touchscreen
- 300nits Brightness
- HDMI+VGA Signal Input
- Aluminum Casing
- Front Panel IP65 Level
- Supports VESA Mount / Embedded Mount


Specifications

LCD Display	Display Type:	21.5inch TFT LED Panel(LED Backlight)
	Aspect Ratio	16:9
	Max. Resolution:	1920x1080
	Luminance(cd/m ²)	300nits
	Backlight Lifetime	30,000hrs (typical)
	View Angle(H°/V°)	160/160
Features	Signal Input	VGA+HDMI
	Colors	16.7M
	Response Time	5ms
Touchscreen	Touch Type	Projected Capacitive Touch
	Controller	USB interface
Environment	Operating Temperature	-10°C ~ 60°C(14~ 140 °F)
	Storage Temperature	-20°C ~ 70°C(-4 ~ 158 °F)
	Front Panel Protection	IP65 compliant
Mechanical	Dimensions	530(L)x320(W)x43.5(H)mm cutout dimension: 513(L)x303(W)mm
	Weight	N.W. 5.2KG
	Color	Black
	Material	Aluminum + SUS
Mount Way	Mount Way	Panel Mount/VESA Mount (75x75mm & 100x100mm)
Input Voltage	Input Voltage	12V 2A
Custom Service	Custom Service	Custom LOGO



Dimensions

Unit: mm

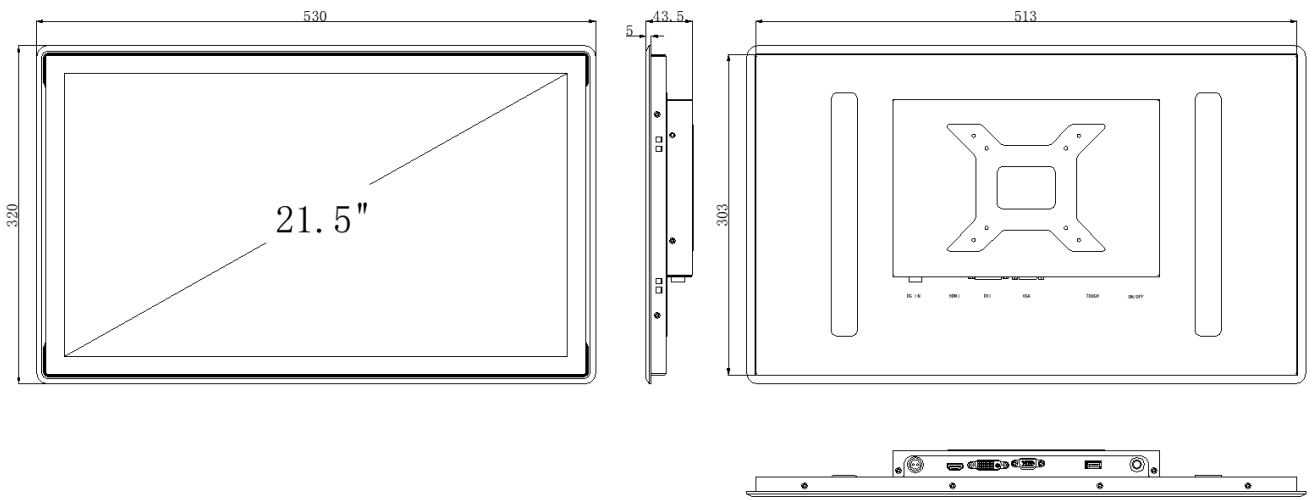

Packing List	Ordering Information
1x FPM-2102K	FPM-2102K: Projected Capacitive Touch Version
HDMI,VGA (2 choose 1)	
1x Power Adapter	